


UFH MANIFOLD PREMIUM

WWW.TWEETOP.COM

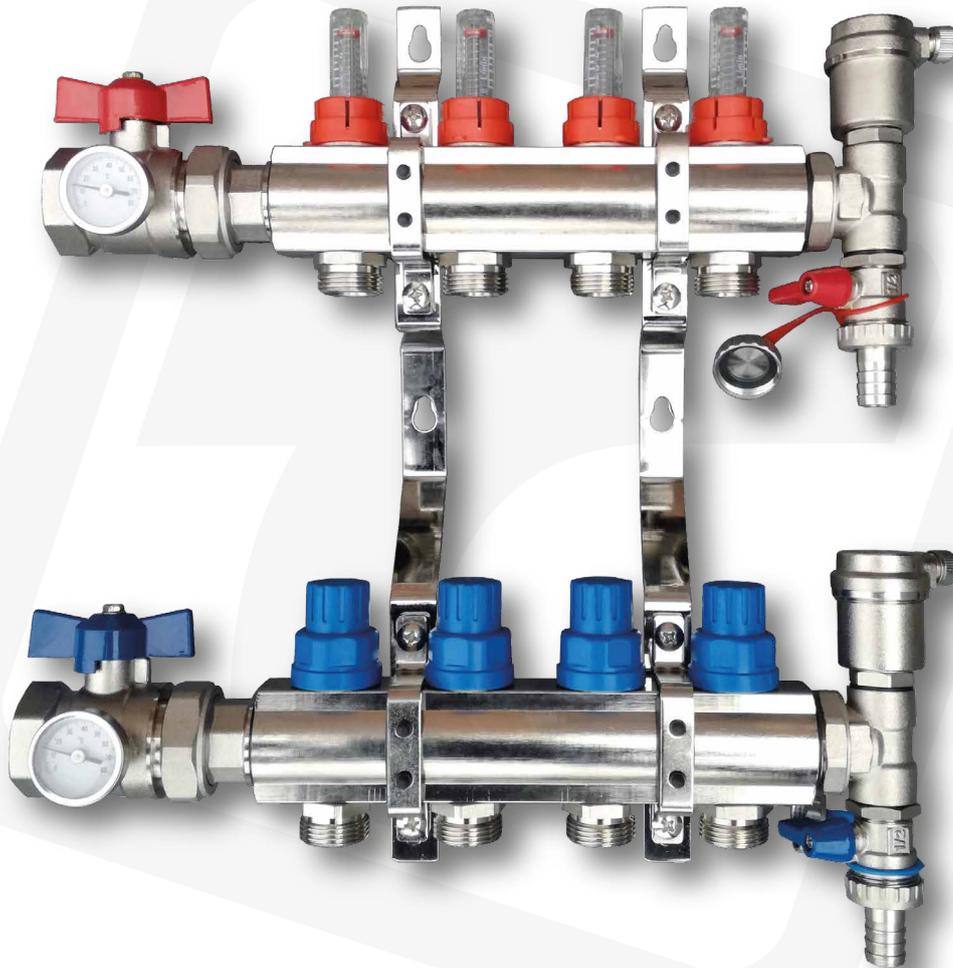

- **Manifold dedicated for surface heating installations**
- **Made of nickel plated brass**
- **Available in multiple versions ranging from 2 up to 12 circuits**

TWEETOP
TM

UFH MANIFOLD PREMIUM

WWW.TWEETOP.COM


Technical specifications:

- Manifold bar dimension: 1 "G
- Circuit connection: 3/4 "GZ (Euroconus)
- Application: water containing commonly used anti-corrosion and anti-freezing agents, permissible water-glycol mixture with a concentration of up to 50%
- Flow measurement range: 0.5 - 5l/min.
- Maximum working pressure: 6 bar
- Working temperature range: -5°C - 60°C

Dimensions:

A [mm]	B [mm]	C [mm]	D [mm]	E [mm]
210	50	382	158	94

L - total manifold length [mm]												
n - number of circuits												
	2n	3n	4n	5n	6n	7n	8n	9n	10n	11n	12n	
L	256	306	356	406	456	506	556	606	656	706	756	

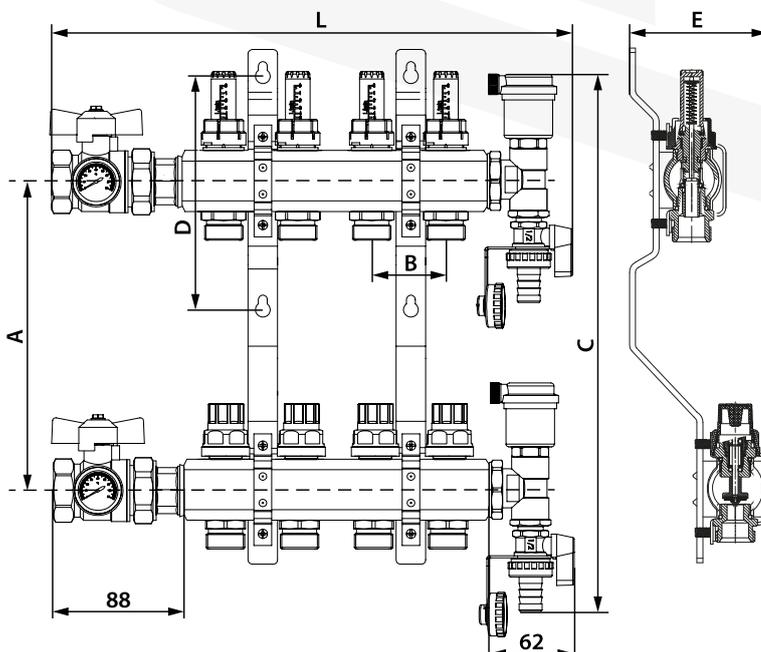

Standard delivery range:

- 1 Supply manifold of 1' size, equipped with:
 - automatic air vent
 - drain valve
 - nipples 3/4' EC for every circuit
 - flow meters for every circuit (flow range 0.5 - 5 l/min)
- 2 Return manifold of 1' size, equipped with:
 - automatic air vent
 - drain valve
 - nipples 3/4' EC for every circuit
 - regulation valve equipped with plastic cap, prepared for actuator installation (thread M30x1.5) for every circuit
- 3 Manifold brackets with sound absorbing insulation
- 4 Cut off valves with thermometer for supply and return manifold

TWEETOPTM

Tweetop sp. z o.o.
Ludowa 24c I 71-700 Szczecin