

Material



- Main body: pressed brass type CW617, nickel-plated from the outside, on surfaces, which do not have contact with water – full anti-diffusion barrier
- Clamping ring: stainless steel
- O-ring gasket: EPDM

Area of application

- Installations of hot & cold tap water
- Central heating (radiator connections)
- Surface heating (underfloor and wall heating installations)
- Ice water

Dimensions

Size	L1	L2	L3	L4	D1	D2	Code
20x16	26	26	45,5	49	15,8	11,8	06012303
25x16	32,6	26	52,5	53,5	19,8	11,8	06012305
25x20	32,6	26	56,5	54	19,8	15,8	06012307
32x20	32,6	26	57	58	25,8	15,8	06012309
40x25	32,6	45	74,6	72	19,8	31,8	06012311
40x32	32,6	45	72,6	78,5	25,8	31,8	06012313
50x40	45	45	97	87,5	31,8	40,8	06012315

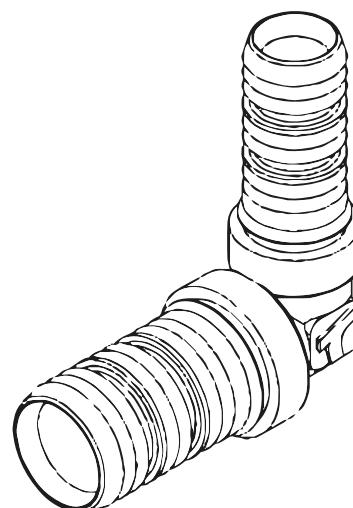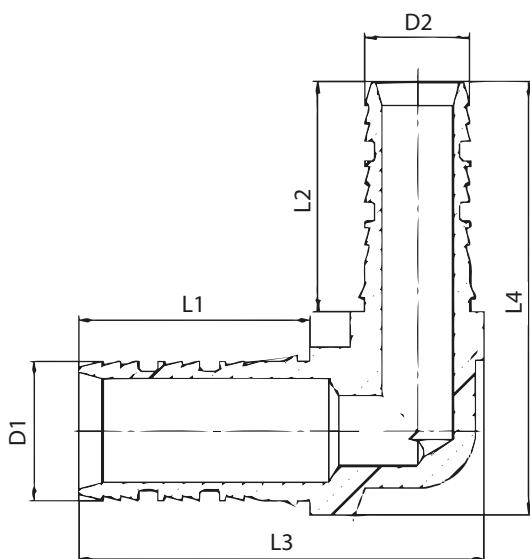

Overview

The connection between the pipe and the fitting is obtained by pressing the pipe into the fitting's profile. The pressing should be made in the connection area, with a pressing tool equipped with U-type inserts, matched to the type of fitting used. The tightness of the connection chamber is guaranteed by two O-rings, perfectly integrated into the joint area. Pressed connections can be used in the floor groove or a wall furrow.

Scope of delivery

Main body with sealing and clamping rings